

E-comfort instant water heater DEX



Application areas

Single and multiple point supply:


- > Bathroom (shower, bath tub, washbasin)
- > Shower
- > Kitchen sink
- > Washbasin



E-comfort instant water heater

DEX

Product information



Energy efficiency class **A** (Scale: A+ to F) **DEX** (Multiple Power System: 18, 21, 24 or 27 kW adjustable)


Part number:	3200-34227			
Type:	closed-outlet			
Maximum operating pressure [MPa (bar)]:	1(10)			
Water connections (thread connections):	G½"			
User set temperature [°C]:	20 to 60			
Hot water output at $\Delta t = 28\text{ K}^{1) 2)}$ [l/min]:	9.2	10.7	12.3	13.8
Switch-on flow rate / max. flow rate [l/min]:	2.5 / 8.0 ³⁾			
Nominal power rating [kW]:	18	21	24	27
Supply voltage:	3~ / PE 400 V AC			
Nominal current [A]:	26	30	35	39
Required cable diameter [mm ²]:	4.0	4.0	6.0	6.0
Bare wire heating system IES®:	✓			
Ready for Smart Control:	✓ (optional)			
Ready for FX wireless remote control:	✓ (optional)			
Solar-compatible, suitable for reheating (inlet temperature $\leq 70\text{ °C}$):	✓			
VDE approved / Protection class:	✓ / IP 25			
Specific water resistance at 15 °C [Ωcm] \geq :	1100			
Nominal volume [litres]:	0.4			
Weight filled with water [kg]:	approx. 3.7			
Dimensions (height × width × depth) [cm]:	46.6 × 23.1 × 9.7			

1) Temperature increase e.g. from 12 °C to 40 °C 2) Mixed water 3) Flow limited for optimum temperature increase

Description

- > Electronically controlled E-comfort instant water heater
- > Large backlit LCD display for temperature display
- > Two temperature memory buttons
- > Precise temperatures between 20 °C and 60 °C due to TWIN TEMPERATURE Control TTC® up to the full rated power output
- > Attractive, very slim design
- > The efficient bare wire heating system IES® reduces lime scale deposits and provides an extended service life
- > Electronic safety system with air bubble detection
- > With the Multiple Power System MPS®, the maximum power rating is set at the time of installation: 18, 21, 24 or 27 kW
- > Easy installation due to accessible mounting area and variable connection options
- > Remote control module available as accessory
- > Can also be controlled via tablet or smartphone (iOS 9 or higher / Android-OS 4.4 or higher, FXE adapter, CLAGE Home Server and the »Smart Control« app required)
- > Solar-compatible (inlet temperature $\leq 70\text{ °C}$)

Convenient touch button controls and LCD display

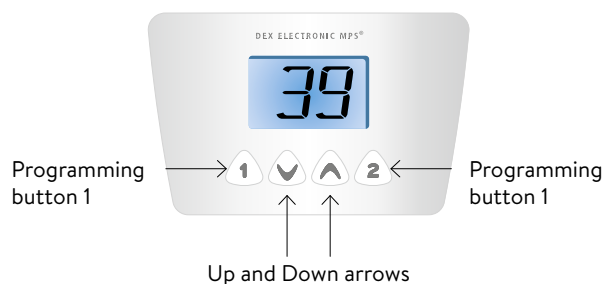

Touch button controls with large backlit LCD display for precise temperature input between 20 °C and 60 °C


Two programming buttons for individual pre-set temperatures, optional temperature limitation, and function and malfunction indicators

E-comfort instant water heater DEX Installation



Sample installation with **two taps**.

Assembly and operating instructions must be observed upon installation.

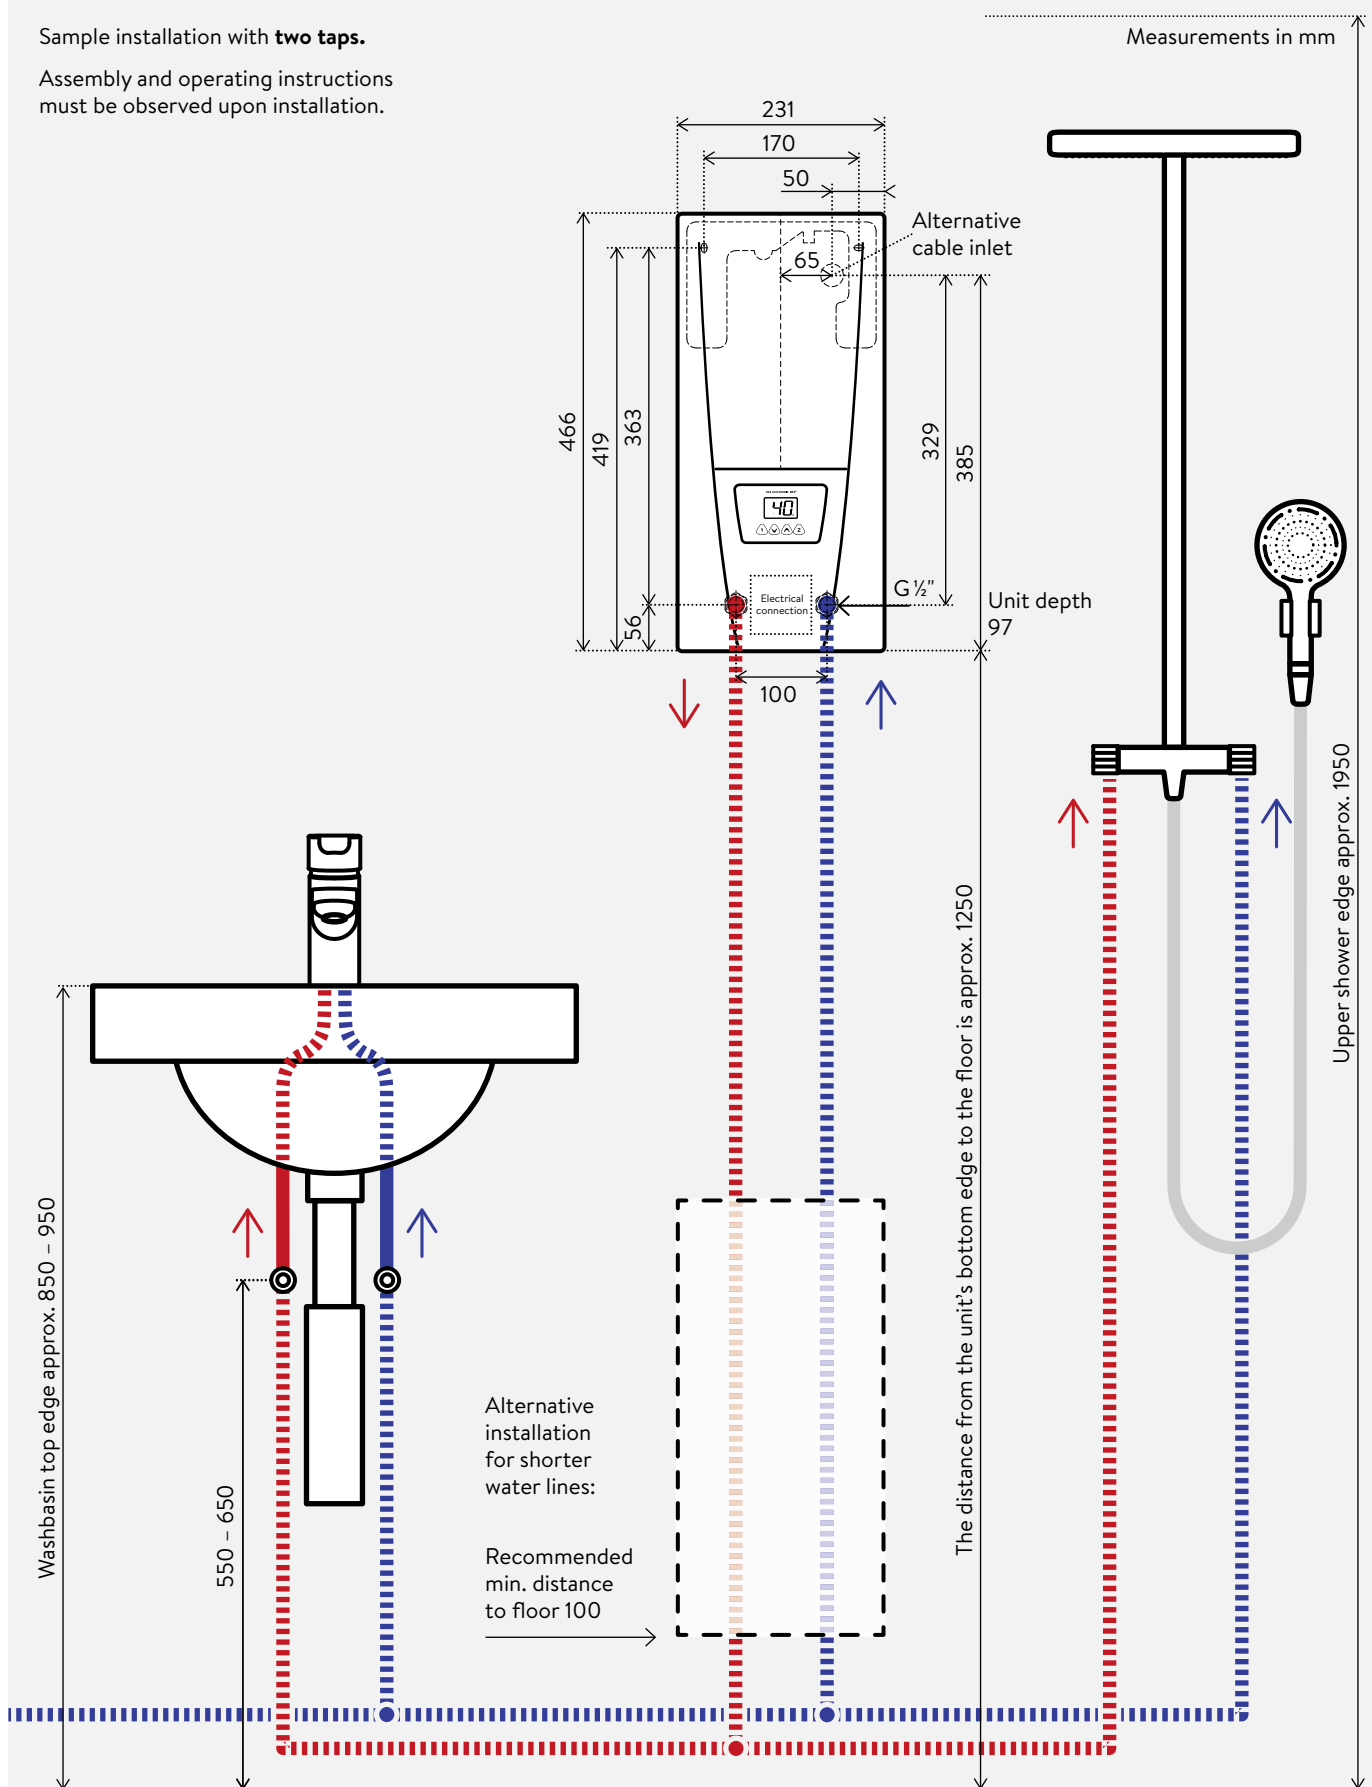





FX (optional)

In addition to user controls directly at the unit, the remote control allows for convenient temperature adjustment of the instant water heater at interior distances of up to 10 meters. Secure, bidirectional wireless transfer, continuous two-button temperature selection, two pre-set buttons and a LCD display, magnetic wall holder and batteries included. IP20.

Dimensions (H × W × D): 5.8 × 12.5 × 1.9 cm

FX: Part no. 2400-26090




Basic mounting kit RDX for more mounting options (optional)

The universal mounting frame RDX, which allows for an electrical connection at any position behind the unit, is available as an accessory.

- > With electronic wiring and tap extensions
- > For difficult installation conditions, for example, exchanging an instant water heater with different connections
- > Compensates for uneven tiles or wall irregularities
- > Installation must be performed by a specialist


RDX: Part no. 3200-34100



Extension kit UDX for under-counter installation (optional)

Pipe assembly for undersink installation with water connections, top flush-mounted G $\frac{3}{8}$ inch (basic mounting kit RDX required).

UDX: Part no. 3200-34110



Extension kit VDX for offset mounting (optional)

Pipe assembly for offset installation or reversed water connections when exchanging gas water heaters (basic mounting kit RDX required).

VDX: Part no. 3200-34120